

BITUSTIK™ Standard / BITUSTIK™ 4000

Double sided, self adhesive, cold applied, waterproofing tape for membrane detailing and sealing

Product Description

BITUSTIK™ is a flexible self adhesive tape coated on both sides with Bituthene rubber bitumen adhesive and reinforced with a fibreglass mesh, to provide excellent adhesion to most building substrates. It is fully compatible with GCP waterproofing membranes.

Applications

- General purpose, double sided waterproof sealing strip for non- exposed applications
- For use as a detailing aid with BITUTHENE®, PREPRUFE®, RAPID- DRAIN™ and GCP Protection boards or as a bedding strip for WATER-BAR™ PVC waterstops.

Installation

Minimum application temperature +5 °C for BITUSTIK™ Standard and -5 °C for BITUSTIK™ 4000.

Concrete surfaces must be smooth, clean and dry. Use BITUTHENE®Primer applied evenly by roller or brush to improve adhesion, particularly on dusty substrates, and allow to dry.

BITUSTIK™ is simply applied by peeling away the silicone release paper and applying one side of the adhesive face to the prepared substrate and roll firmly to ensure complete adhesion without creases or voids. Roll ends and cut edges should be overlapped 50 mm minimum and rolled firmly to ensure a watertight seal.

Once the first adhesive face has been applied and rolled, peel off the second release paper and apply the other material (WATER-BAR™ PVC waterstops, PREPRUFE® or BITUTHENE® membranes, RAPIDDRAIN™ drainage or GCP Protection).


Specification

BITUSTIK™ Standard / BITUSTIK™ 4000 to be applied in accordance with the manufacturer's instructions and supplied by GCP Applied Technologies.

Health and Safety

There is no legal requirement for a Safety Data Sheet (SDS) for BITUSTIK™ Tapes. For health and safety questions on these products please contact GCP Applied Technologies.

For BITUTHENE®Primer, read the product label and Safety Data Sheets before use. Users must comply with all risk and safety phrases. SDS's can be obtained from GCP Applied Technologies or from our web site at gcpat.com.

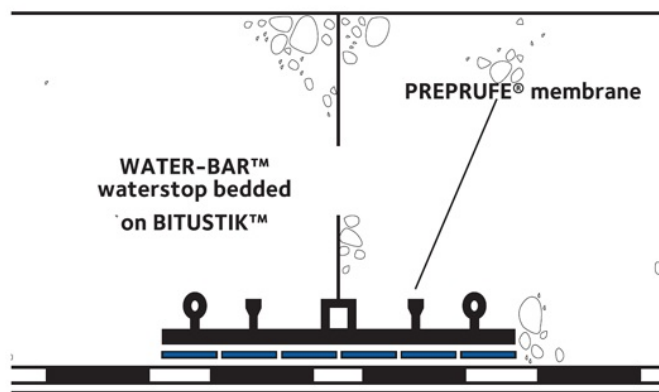

Details shown are typical illustrations only and not working drawings. For assistance with working drawings and additional technical advice please contact GCP Technical Services.

Supply

BITUSTIK™ STANDARD		
Thickness	1.5 mm nominal	
Roll Sizes	150 mm x 12 m long	weight 3.5kg
	240 mm x 12 m long	weight 5.5 kg
BITUSTIK™ 4000 / 4000HC		
Thickness	1.5 mm nominal	
Roll Sizes	150 mm x 12 m long	weight 3.5kg
	240 mm x 12 m long	weight 5.5 kg
Ancillary Products		
BITUTHENE® Primer	20 L pails	
Coverage	8-10 m ² per litre depending on surface porosity	
Lap Roller	Unit	
Storage	Store in original packaging in dry conditions between 5 °C & 30 °C	

Equipment by others: Stanley knife or similar, hand roller. Roller or brush for primer.

gcpat.com.au | For technical information: anz.enq@gcpat.com

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

BITUSTIK, BITUTHENE, WATER-BAR, RAPID-DRAIN and PREPRUFE are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2019 GCP Applied Technologies, Inc. All rights reserved.

Printed in Australia GCP PDS 052 07/17

GCP Applied Technologies Inc., 2325 Lakeview Parkway, Alpharetta, GA 30009, USA

GCP Australia Pty. Ltd., 14 Colebard Street West, Archerfield, Brisbane, Queensland 4108, Australia

This document is only current as of the last updated date stated below and is valid only for use in Australia. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.com.au. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2025-05-13

gcpat.com.au/solutions/products/bituthene-post-applied-waterproofing/bitustik-standard-bitustik-4000